




YOUR TRUSTED PARTNER IN ADDITIVE MANUFACTURING

# MATERIALS & APPLICATIONS

# WIDE RANGE OF POLYMERS

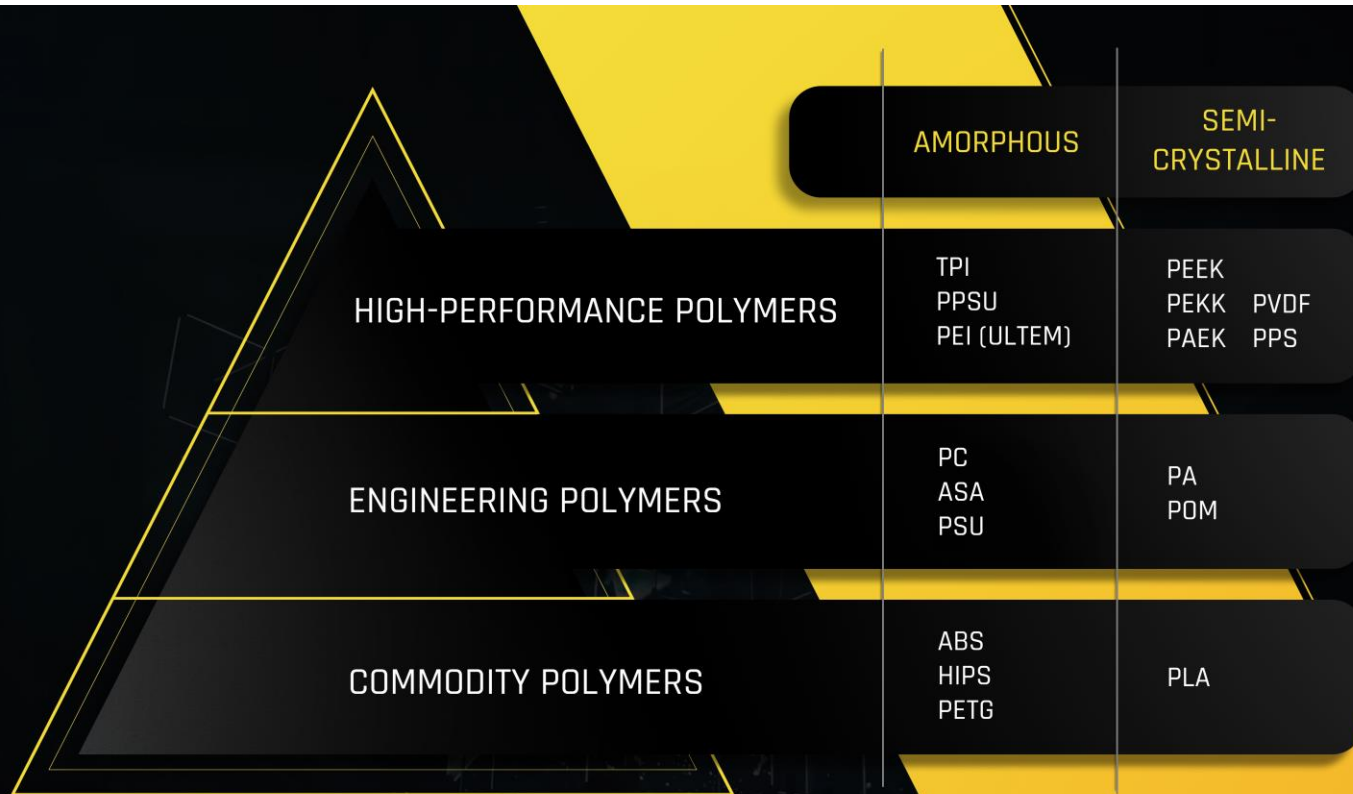

# BENEFITS OF **HIGH-PERFORMANCE** POLYMERS

New solutions are needed for many applications where metal is not the optimal solution



# MATERIALS **APPROVED** BY THE INDUSTRIES

With miniFactory you have access for the widest material range on the market without any additional licenses or fees.

From commodity and engineering polymers all the way up to the most demanding high-performance polymers and composites.  
Material range is many times wider than in “closed systems” or in the systems with lower chamber temperature.




## ENGINEERING MATERIALS

Produce parts utilizing a broad spectrum of established engineering polymers.



## CARBON FIBER MATERIALS

Build strong and lightweight parts by choosing carbon fiber reinforced polymers to the metal replacement applications.

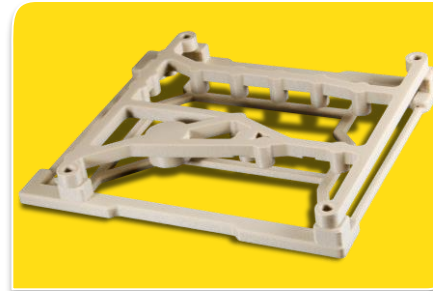

## PEEK/PEKK/PAEK MATERIALS

Make valuable PEEK parts in-house with all materials of the PAEK Polymer family.




## VALIDATED MATERIALS

Making parts for aerospace or motorsports?  
Are you looking for a material compatible for EN45455 or UL94 V-0?

# POLYMER COMPARASION

1 = Low  
3 = Good  
5 = Superb



	PEEK / PEKK	TPI	ULTEM 9085	PVDF	PA 6/66 CF	PC	ABS	PLA
Heat resistance	250°C	240°C	175°C	150°C	150°C	135°C	80°C	50°C
Flame resistance	UL94-V0	UL94-V0	UL94-V0	UL94-V0	-	-	-	-
Chemical resistance	5	3	3	5	2	1	1	-
Electrical Insulation properties	5	4	3	5	-	3	4	2
Wearing resistance	5	3	3	4	3	2	1	1
CF/GF reinforced grade available	Yes	Yes	Yes	-	Yes	Yes	Yes	Yes
Tensile strength	100 MPa	80 MPa	85 MPa	50 MPa	90 MPa	65 Mpa	35 Mpa	40 Mpa
Cost	€€€€€	€€€€	€€€	€€€	€€	€€	€	€



# PEEK-CF

PEEK (Polyetheretherketone) is a semi-crystalline thermoplastic with excellent mechanical and chemical resistance properties.

## KEY ADVANTAGES

- Heat resistance up to 260°C
- High strength and toughness
- Great abrasion and wear resistance
- Excellent hydrolysis resistance
- Low smoke and toxic gas emissions

## MATERIAL APPLICATIONS

- Bearing retainers
- Gears
- Bushings
- Oil and gas processing equipment
- Seals
- Aircraft hardware and fasteners





# PEEK / PEKK


PEEK (Polyetheretherketone) and PEKK (Polyetherketoneketone) are semi-crystalline thermoplastics with excellent mechanical and chemical resistance properties.

## KEY ADVANTAGES

- Heat resistance up to 250°C
- Low thermal conductivity
- Great abrasion and wear resistance
- Excellent chemical resistance
- Low smoke and toxic gas emissions

## MATERIAL APPLICATIONS

- Bearing retainers
- Gears
- Bushings
- Oil and gas processing equipment
- Seals
- Fluid applications

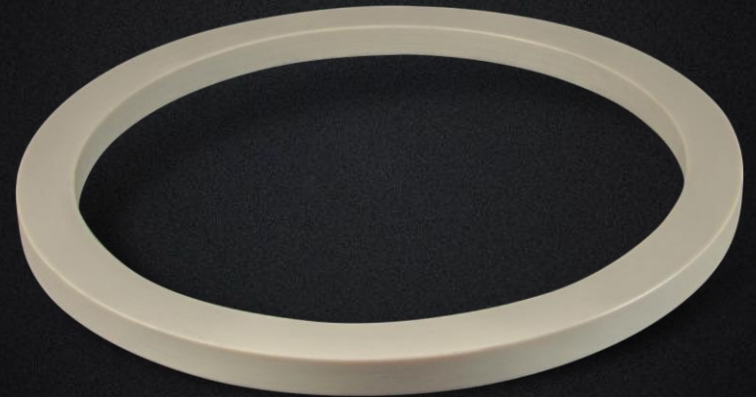



# PEEK-GF

PEEK (Polyetheretherketone) is a semi-crystalline thermoplastic with excellent mechanical and chemical resistance properties.

## KEY ADVANTAGES

- Heat resistance up to 280°C
- Low thermal conductivity
- Great abrasion and wear resistance
- Excellent chemical resistance
- Low smoke and toxic gas emissions

## MATERIAL APPLICATIONS

- Bearing retainers
- Gears
- Bushings
- Oil and gas processing equipment
- Seals
- Fluid applications





TPI (Thermoplastic polyimide) offers extreme resistance to heat and provides high electrical insulation properties even in the most demanding environments.

## KEY ADVANTAGES

- Heat resistance up to 240°C
- High dielectric strength
- Inherent flame resistance (UL94 V-0) with thin wall FR capability at 0,75mm
- Halogen free
- Excellent creep resistance

## MATERIAL APPLICATIONS

- Electrical insulation parts
- Connectors
- High-temperature assemblies
- Molding applications
- Semiconductor applications



# ULTEM1010 / PEI1010

PEI 1010 (Polyetherimide) is used in applications that require high heat resistance, high strength or excellent electrical insulation properties.

## KEY ADVANTAGES

- Heat resistance up to 210°C
- Excellent electrical insulation properties
- Good chemical resistance
- Inherent flame resistance (UL94 V-0)
- FDA grade available

## MATERIAL APPLICATIONS

- Electrical insulation parts
- Electrical switches and controls
- Thermoforming molds
- Composite Lay-Up tooling
- Custom tools for metal and plastic
- FDA applications



# ULTEM9085 / PEI9085

PEI 9085 (Polyetherimide) filament is based on a polyetherimide blend for use in the aerospace market. It is ideal for the aerospace, marine and railway.

## KEY ADVANTAGES

- Heat resistance up to 170°C
- Certified for aircraft components
- FST compliant with an OSU rating of 55/55
- Inherent flame resistance (UL94 V-0)
- Fire Protection of Railway Vehicles (EN45545-2)

## MATERIAL APPLICATIONS

- Interior components
- Ventilation system components
- Cable ducts
- Latches
- Throttle bodies
- Thermostat housings



# ▶ PEKK-A

PEKK-A (PolyEtherKetoneKetone) offers extremely low outgassing, high mechanical properties and exceptional resistance to extreme environments.

## KEY ADVANTAGES

- Heat resistance up to 150°C
- Extremely low outgassing
- Inherent flame resistance (UL94 V-0)
- Fire Protection of Railway Vehicles (EN45545-2)
- Low FST (Flame, Smoke, Toxicity)
- Comparable to Stratasys ANTERO800NA material

## MATERIAL APPLICATIONS

- Railway interior parts
- Space grade parts
- Trays and packaging
- EMI/RFI shielding
- Technical insulation parts
- Ducting



# ESD-PEKK

ESD-PEKK (Electrostatic Dissipative PolyEtherKetoneKetone) is an aerospace grade thermoplastic with static dissipative properties.

## KEY ADVANTAGES

- Heat resistance up to 150°C
- $10^7$  to  $10^9$ ohm surface resistivity on 3DP sample
- Consistent surface resistivity and low particulate contamination
- Low outgassing - ideal for space related applications
- Excellent resistance to a broad range of chemicals

## MATERIAL APPLICATIONS

- ESD-safe parts
- Low-volume production parts
- Functional prototypes
- ESD-safe jigs/fixtures
- Aerospace / space vehicle components
- Electronics industry parts




PPSU (Polyphenylsulfone) is known for its excellent resistance to chemicals and heat. This makes it optimal choice for medical devices requiring repeated sterilization.

## KEY ADVANTAGES

- Heat resistance up to 220°C
- Excellent chemical and thermal resistance
- Sterilization capable – incl. EtO gas, radiation, steam autoclaving, plasma etc.
- Excellent hydrolysis resistance
- Exceptional toughness and durability

## MATERIAL APPLICATIONS

- Sterilization trays and cases
- Surgical instrument handles
- Clean-room compatibility parts
- Hot water fittings
- Plumbing manifolds
- Low-volume injection molds

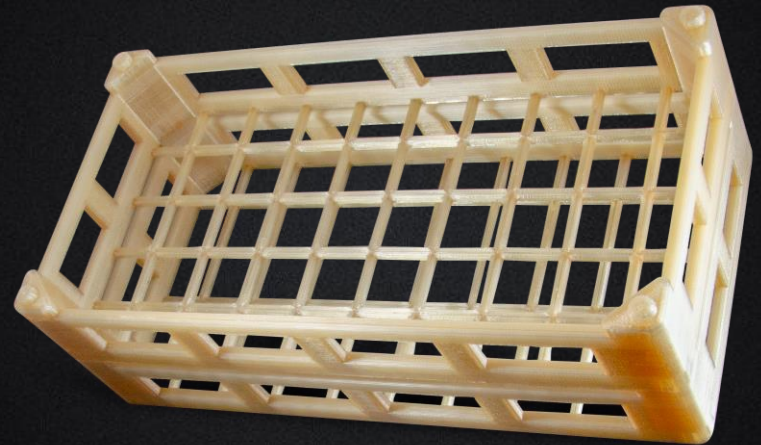

# > PVDF-C

PVDF (Polyvinylidene Fluoride) is a semi-crystalline fluoropolymer with excellent abrasion resistance and outstanding weatherability.

## KEY ADVANTAGES

- Heat resistance up to 150°C
- Good resistance to acids and solvents
- Extremely high electrochemical stability
- Great abrasion and wear resistance
- Outstanding resistance to sunlight/UV exposure

## MATERIAL APPLICATIONS

- Semiconductor applications
- Wear resistance applications
- Electrical insulations
- Food / Beverage processing
- Chemical process equipment
- UV resistance applications



# > PA-CF


Carbon reinforced PA (Polyamide) is ideal for demanding racing and engineering structural applications that require robust performance at elevated temperatures.

## KEY ADVANTAGES

- Heat resistance 150°C
- PA6/66 – up to 100% stronger than PA11/PA12
- Strong and durable
- High dimensional stability

## MATERIAL APPLICATIONS

- Racing applications
- Protective and supporting sports gear
- High performance functional parts
- Manufacturing jigs and fixtures
- Light weight applications
- High-end engineering applications

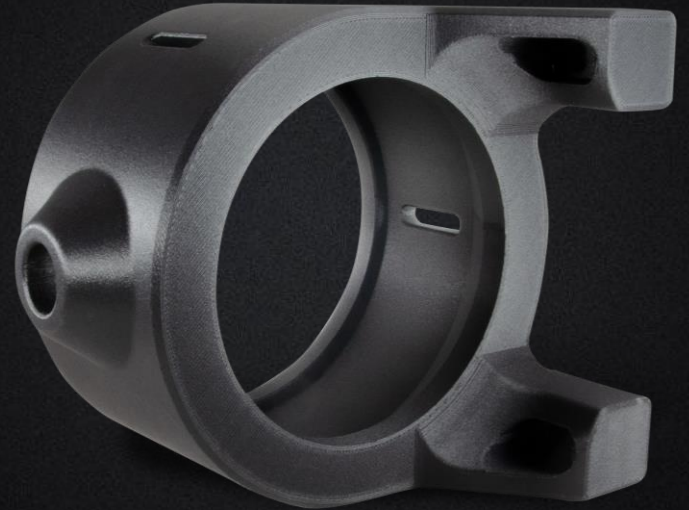



# > PC-FR

PC-FR (Polycarbonate) offers high resistance to heat. It is well suited to a variety of applications such as the production of parts in the food industry.

## KEY ADVANTAGES

- Temperature tolerance (from -100°C to +140°C)
- Sterilization capable
- Food contact certification EU10/2011, FDA 21 CFR
- Excellent impact resistance
- Low hydrolysis sensitivity

## MATERIAL APPLICATIONS

- Processing line parts
- Dispensers
- Brackets
- Housing parts
- Jigs
- Grabbers




PC-S (Polycarbonate) offers high resistance to heat. It is well suited to a variety of applications such as the production of parts in the food industry.

## KEY ADVANTAGES

- Temperature tolerance (from -100°C to +140°C)
- Sterilization capable
- Food contact certification EU10/2011, FDA 21 CFR
- Excellent impact resistance
- Low hydrolysis sensitivity

## MATERIAL APPLICATIONS

- Processing line parts
- Dispensers
- Brackets
- Housing parts
- Jigs
- Grabbers

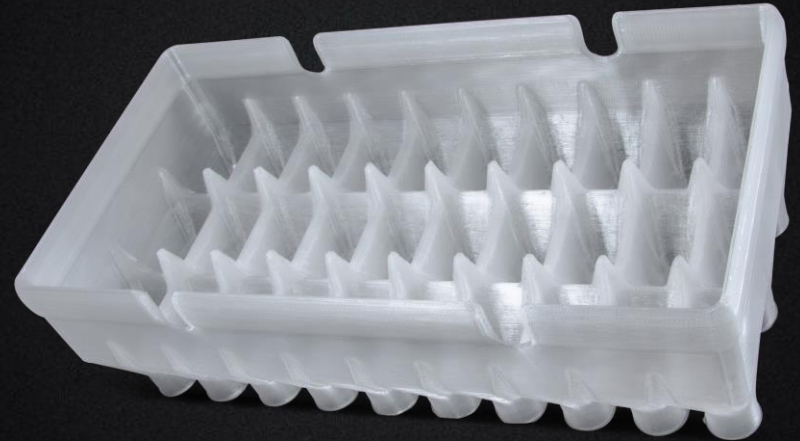

# > ABS

ABS (Acrylonitrile butadiene styrene) provides favorable mechanical properties such as impact resistance, toughness, and rigidity when compared with other common polymers

## KEY ADVANTAGES

- Heat resistance 90°C
- Good impact resistance
- Good mechanical properties
- Cost-efficient

## MATERIAL APPLICATIONS

- Enclosures
- Automotive parts
- Brackets
- Housing parts
- Jigs





# IGLIDUR

IGLIDUR is made of high-performance polymers that are characterised by their special properties: their special composition makes them extremely wear-resistant, robust and self-lubricating

## KEY ADVANTAGES

- Extreme wear resistant
- Excellent coefficient of friction.
- Resistant to edge pressure.
- Resistant to shocks and impacts.
- Particularly resistant to dirt and dust.

## MATERIAL APPLICATIONS

- All wearing applications



# APPLICATIONS



# RAILWAY

## KEY ADVANTAGE

- 3D printing of certified EN45545-2 materials offers the possibility to manufacture spare parts individually or in small series. It is also more cost-effective, and the parts can be manufactured directly to where it is needed.





# AEROSPACE

## KEY ADVANTAGE

- ULTEM9085 -resin is a well-known, widely used, and certified material for aviation. 3D printing can be used to manufacture parts for various applications, e.g., ventilation systems, interior assemblies, cable ducts, brackets, enclosures and protective parts.





# MOTORSPORTS

## KEY ADVANTAGE

- 3D printing with high-performance polymers and composites in motorsport enables the production of racing grade parts on-demand and on-site faster than ever before.







# ELECTRONICS

## KEY ADVANTAGE

- Ultra polymer 3D printing is a very cost-effective manufacturing method for a wide variety of insulative parts. Therefore it should be considered for a wide range of high-temperature applications in electronics.





# SPACE

## KEY ADVANTAGE

- One of the key development areas in aviation is to reduce fuel consumption. One way to succeed here is to manufacture lighter parts; they enable lower energy use and thus reduce fuel consumption.





# ROBOTICS

## KEY ADVANTAGE

- With high-performance polymer 3D printing, the robotic tools can be made lighter and functional under harsh conditions.






# MEDICAL

## KEY ADVANTAGE

- With miniFactory Ultra 3D printer, medical Industry OEMs can achieve the flexibility of development and production with the right materials to match the strict regulations of the industry.

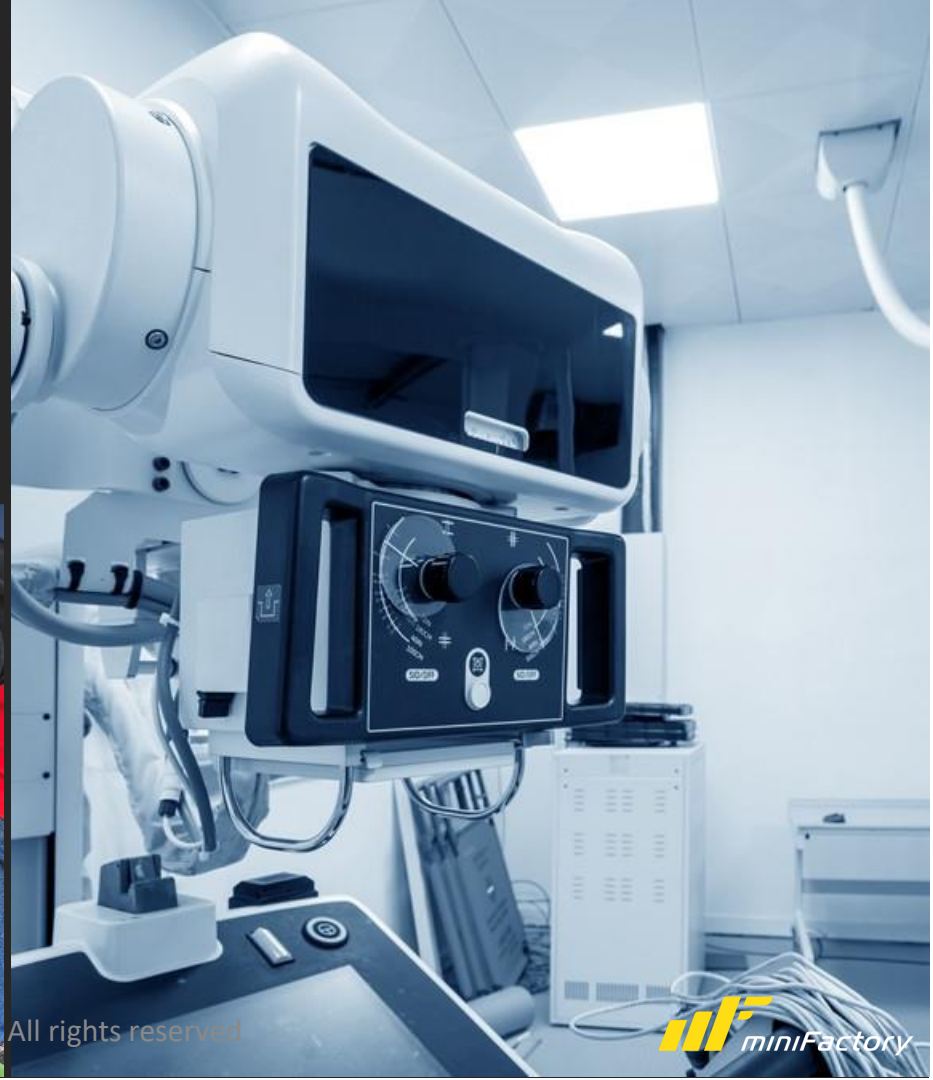



# FOOD

## KEY ADVANTAGE

- 3D printing in food Industry enables manufacturing of complex geometries to create development parts for processing machinery. Food certified materials and printed with miniFactory Ultra open unprecedented opportunities for the designers.






# OIL & GAS

## KEY ADVANTAGE

- 3D printing in the oil and gas industry offers the opportunity to manufacture low-volume spare parts that are relatively expensive to manufacture and store.

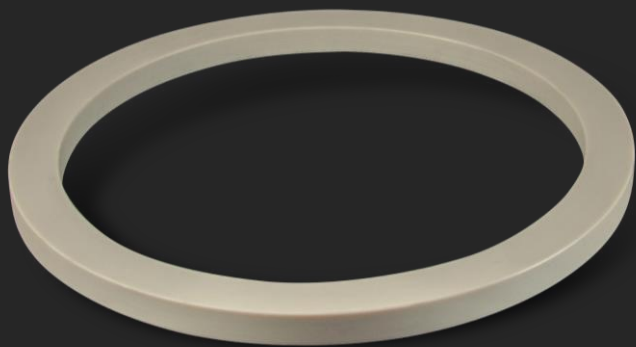




# DEFENSE

## KEY ADVANTAGE

- When schedules are non-negotiable, 3D printing high-performance polymers gives defence manufacturers the freedom to rapidly manufacture or build complex, functional prototypes and test parts.

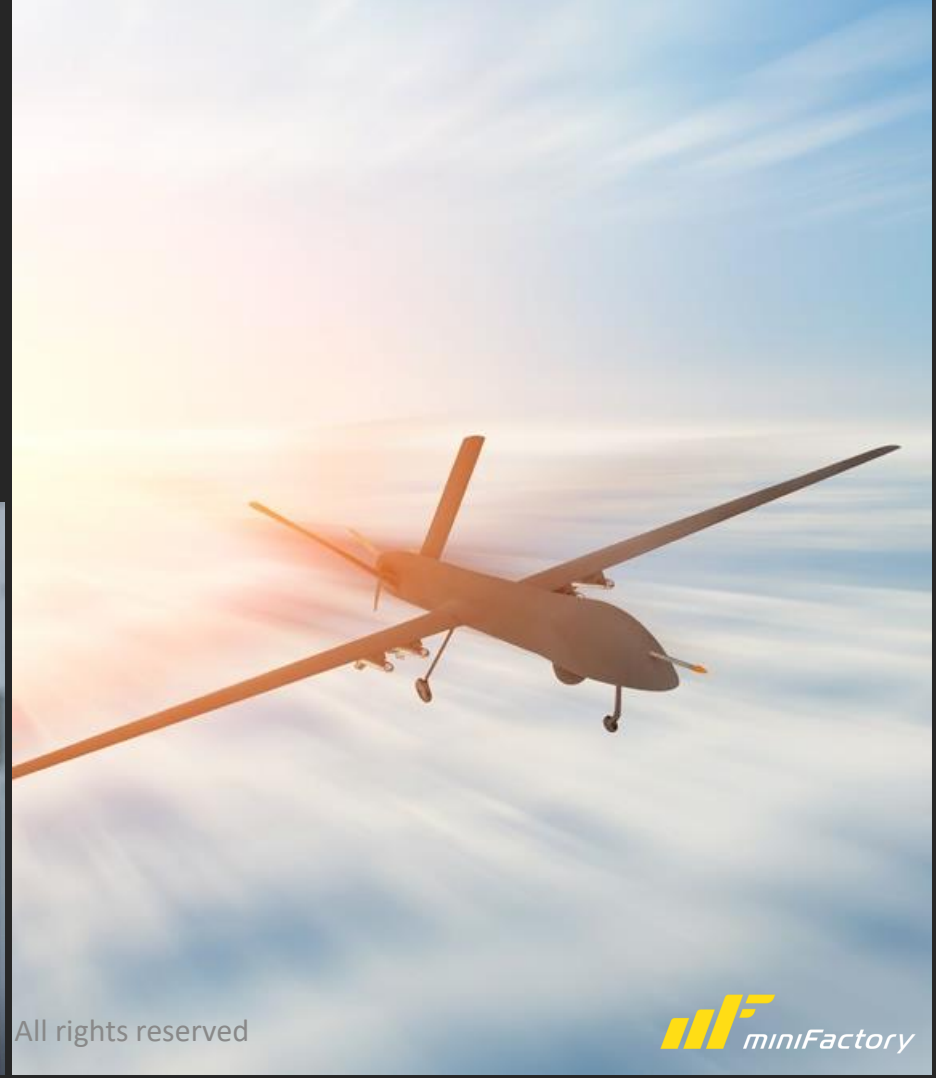



**miniFactory Oy Ltd**

TIEDEKATU 2  
60320 SEINÄJOKI  
FINLAND

VAT ID: FI25182357

[WWW.MINIFACTORY.FI](http://WWW.MINIFACTORY.FI)

ULTEM and EXTEM are trademarks of SABIC GLOBAL TECHNOLOGIES B.V

DISCLAIMER: INFORMATION AND RECOMMENDATIONS CONTAINED IN THIS DOCUMENT ARE GIVEN IN GOOD FAITH. HOWEVER, MINIFACTORY MAKES NO EXPRESS OR IMPLIED REPRESENTATION, WARRANTY OR GUARANTEE (i) THAT ANY RESULTS DESCRIBED IN THIS DOCUMENT WILL BE OBTAINED UNDER END-USE CONDITIONS, OR (ii) AS TO THE EFFECTIVENESS OR SAFETY OF ANY DESIGN OR APPLICATION INCORPORATING MINIFACTORY'S MATERIALS, PRODUCTS, SERVICES OR RECOMMENDATIONS. MINIFACTORY SHALL NOT BE RESPONSIBLE FOR ANY LOSS RESULTING FROM ANY USE OF ITS MATERIALS, PRODUCTS, SERVICES OR RECOMMENDATIONS DESCRIBED IN THIS DOCUMENT.

Each user is responsible for making its own determination as to the suitability of MINIFACTORY'S materials, products, services or recommendations for the user's particular use through appropriate end-use and other testing and analysis. This MINIFACTORY data is for comparative purposes only.